



VueZone Mobile for iPhone/iTouch

# User Guide

Version 2.1.5

## Contents

The VueZone personal video network and your smartphone are a powerful combination. With VueZone Mobile apps, you can take remote video viewing to the extreme! Your iPhone, iPod Touch or iPad becomes a window to your life to see what you're missing when you can't be there. No longer tied to your computer, you can watch your cameras while on the go, wherever you are.


For more information about VueZone Mobile and smartphones supported go to [www.VueZone.com/mobile](http://www.VueZone.com/mobile).

## VueZone Mobile for iPhone

### Downloading and installing

On your iPhone, iTouch or iPad, open the App Store and search for VueZone. Click on the selection and then click on the Free button in the upper right. When the “Free” button toggles to a “Install” button, click and install, and follow any on screen directions.

### Using VueZone Mobile

Click on the VueZone icon  to start the application. When prompted, enter your existing VueZone email address and password in the fields provided.


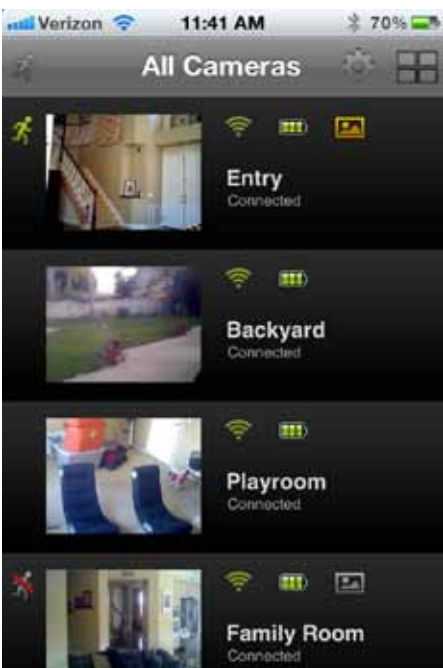




**Tip:** You can store your username and password by selecting “Yes” when prompted at login.



### Quick Tour of VueZone Mobile

You’ll see two main sections on VueZone Mobile: All Cameras screen and specific camera screens. This is where you control everything for your VueZone personal video network. The default page after login is All Cameras.

### All Cameras screen

To view a particular camera, touch the screen to select the camera you wish to view. The selected camera will automatically start streaming.



	Arm/ Disarm all motion detection cameras	
	Settings - enables you to remote restart your gateway if	
	View all cameras - this allows you to see all of your cameras in a round robin fashion (refreshed snapshot images).	
	Motion sensor icon: This icon appears if your camera has a motion sensor. It is gray when not armed, green when armed, and red when it has been triggered. <u>When touched you will be able to arm/disarm your specific camera and control the record settings.</u>	
	Signal strength: Indicates signal strength of the camera, relative to the VueZone gateway.	

	<p>Battery power: Indicates how much battery power you have remaining in that camera.</p>	
	<p>Library icon: Click to see your recorded content. The icon turns orange to indicate that there is new content in the library since your last login. *This only appears if you have any saved recordings.</p>	


**Tip:** You can also access your library and motion sensor settings from the specific camera screen.

### Viewing your cameras

There are five controls on the toolbar.

		<p><b>Snapshot:</b> Takes still images.</p>
		<p><b>Start / Stop Streaming:</b> Starts and stops video stream, or stops recording if it is recording.</p>
		<p><b>Record:</b> Starts and stops recording video clips. The border around the video turns red when recording is in progress.</p>
		<p><b>Zoom:</b> Allows you to zoom into the video by up to 4x, and zoom back out.</p>
		<p><b>Brightness:</b> There are three settings: bright light, normal image and low light.</p>


### Take a Snapshot



1. While viewing the live stream click the  icon to take a picture.
2. Photo will automatically be saved and can be seen in the my.VueZone.com library in addition to the iPhone library.

**Tip:** You can take a snapshot even if the live video is off by clicking the camera icon.

### Zoom

You can zoom in on the video you see from the cameras.


- 1) When streaming video, click on the  icon in the control bar.
- 2) You'll see the zoom window appear, with the option to zoom in by 1x or 2x.
- 3) You can move the zoom area by clicking on the box and dragging.
- 4) Once you have selected an area and zoom level, click "Save."
- 5) The image will refresh to show the zoomed-in area.

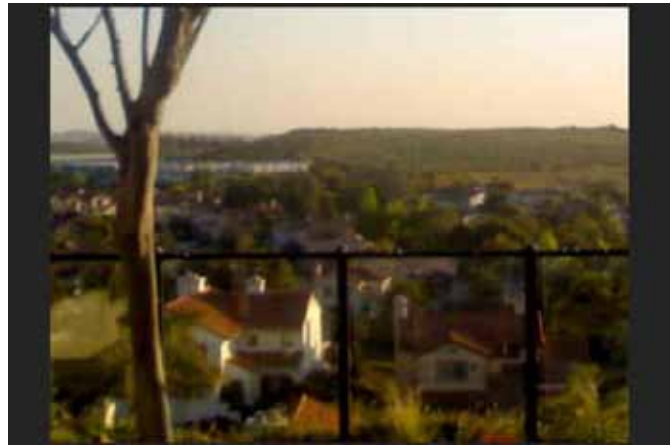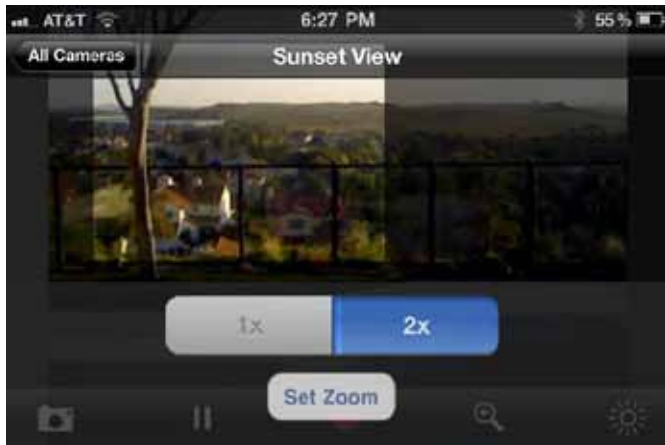

To remove the zoom:


1. While streaming video, click on the “magnifying glass icon” again.
2. Change zoom level to 1x.
3. Click “Save.”

### Viewing recorded content


1. Click on the library  icon (you will be presented with the most recent saved media items for that camera).
2. To see the previous image(s) wipe your finger on the screen from right to left
3. To delete a file, click on the trashcan in the lower right. You will be asked to confirm that you really want to delete this item.

**Tip:** Items deleted via your iPhone will be deleted from your my.VueZone.com account.


### Share Recorded Content

1. While on the video or snapshot you want to share, click on the  icon
2. You will be presented an email screen. Fill out the applicable information and click “Send” in the upper right.

**Tip:** Separate multiple email addresses with commas. You can also select emails from your contact list by selecting the + button.

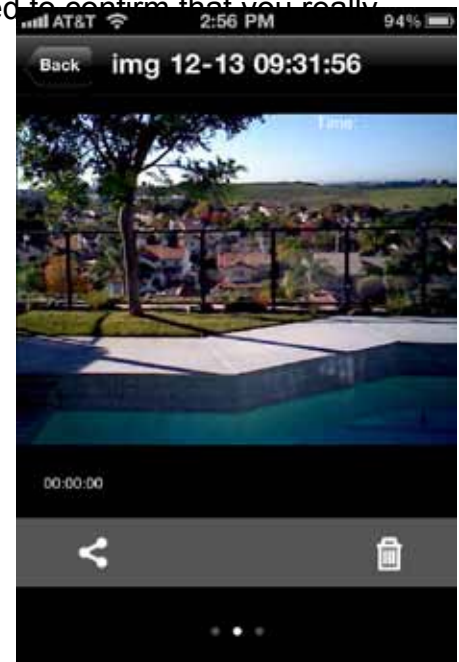

## VueZone motion detection cameras

If you have a motion detection camera, you'll see a motion sensor icon to the right of the battery power indicator . Click on this icon to arm/disarm your camera, choose motion sensor sensitivity, capture format, capture duration, zoom and alert preferences.

### Motion Sensor Settings - Arm / Disarm camera

Select whether you want your camera to be armed or not by clicking either “on” or “off.”

**Tip:** You can arm/disarm your cameras on both the All Cameras page and the specific camera screen.



### Motion Sensor sensitivity

Select, by sliding, how sensitive you want the motion cameras to be. The more to the right the higher the sensitivity.

### Capture format

Capture Format - select whether you want your recording to be a snapshot or video

### Capture duration

For video formats only - select between and 10 and 40 seconds of video recording.

### Auto record settings

Specify the resolution and lighting conditions of recorded events. Click to select.

Resolution setting options are: 320x240, 640x480 and 1600x1200\*.

\*Note: 1600x1200 resolution not supported with series 1000 gateways (model VG100T)

Bright light: reduces exposure for bright light or outdoor settings.


Normal image: Is the default brightness control.

Low light: increases exposure for lower light settings

## Zoom

Select the area of focus that you would like the camera to record.

1. Select zoom - hit the 2x button and the zoom window appears.
2. Move the zoom area by clicking on the box and dragging.
3. Select the preview button in the upper right to see what will be saved. Your preference has been saved.
4. Click the back button (has the camera name) in the upper left to go back to the camera page.

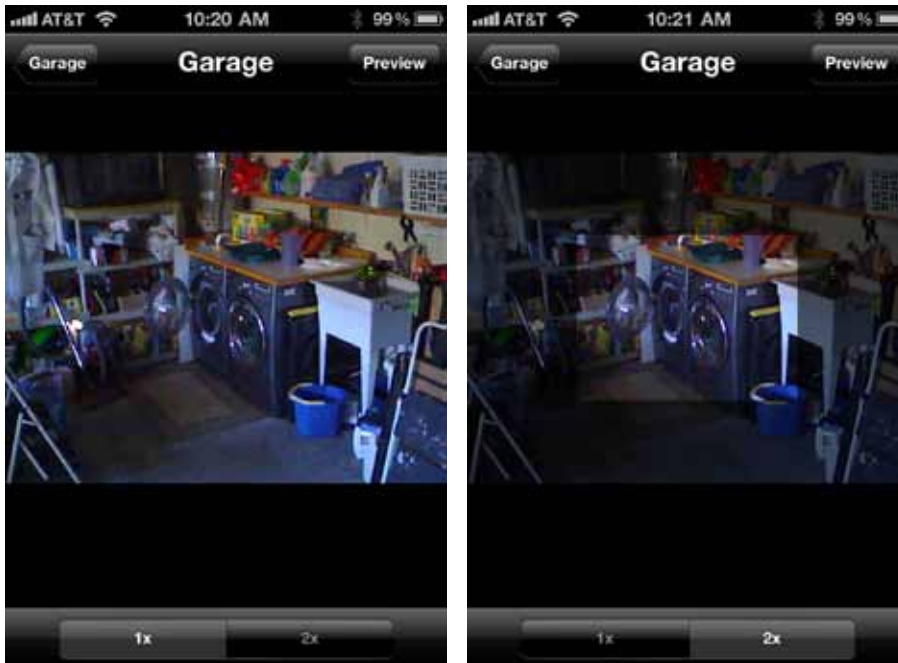

**Tip:** This zoom setting will only effect auto (unattended, not live) recordings from motion detection and scheduled events. This will not impact live viewing.

## Alert settings

Alert Settings specify whether you want to receive an email alert when an event is triggered and add emails to have the alert sent to.

1. Select whether you want alert emails sent when motion is detected.
2. Add recipients to receive the alerts by clicking “Alert Recipients” and adding email addresses
3. Click on “Alert Message” to enter a brief message that you would like to include in the email alert when motion is detected.

**Tip:** You may include a personalized message. If no message is entered a default message will be sent.